

First round display in PowerView family line

Powerful high-speed processor for smooth animations

Bonded glare-free LCD screen for superior visibility in sunlight



## FIRST ROUND DISPLAY IN THE POWERVIEW LINE-UP MERGES CLASSIC STYLE WITH MODERN PERFORMANCE

Introducing the PowerView® U35—the cornerstone of the all-new Ultimate Series. As the first round display in the acclaimed PowerView® lineup, the PowerView® U35 combines cutting-edge technology with a sleek, timeless design, redefining what a gauge can be. This revolutionary display is crafted for those who demand precision, durability, and aesthetic appeal in one seamless package.

Featuring an ultra-bright, high-resolution display, the PowerView® U35 ensures visibility in any environment, from intense sunlight to low-light conditions. With a lightning-fast processor, this display delivers real-time responsiveness, keeping you in control at all times. Engineered to handle the toughest conditions, its IP67 rating guarantees resilience

against dust, water, and extreme elements. The PowerView® U35 is more than a gauge replacement—it's the ultimate display solution for rugged applications, merging classic style with modern performance.

## INTRODUCING THE POWERVIEW ULTIMATE SERIES

### BUILT FOR POWERVIEW:


PowerVision Configuration Studio® software version 8.9+ lets programmers design stunning user interfaces, create intelligent applications with scripting and prototyping quickly with a vast library of standard engine parameters.

# POWerview® U35

78700696 01-2025

## DIMENSIONS

IMAGES DO NOT REFLECT ACTUAL DISPLAY - FOR EXAMPLE ONLY

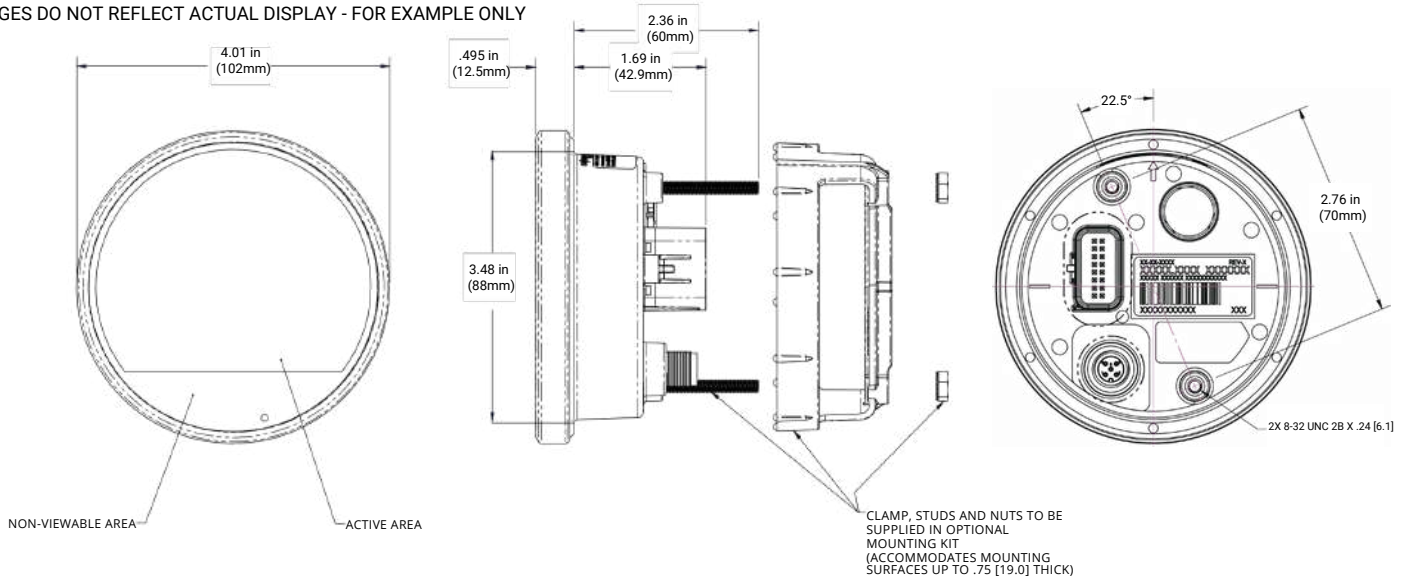

## PRODUCT SPECIFICATIONS

COMPUTING		INTERFACES	
PROCESSOR	Dual-Core A7 Processor at 1.0 GHz	CAN	(1) CAN
OPERATING SYSTEM	QNX® Realtime Operating System	SERIAL	(1) USB 2.0
STORAGE	8GB Flash Memory	ETHERNET	(1) Ethernet
RAM	512 MB DDR3-SDRAM		
MATERIAL & FINISH		ELECTRICAL/ENVIRONMENTAL	
BEZEL	Stainless Steel - Black Powder Coat	OPERATING VOLTAGE	6 – 36 VDC, reverse polarity protected
COVER GLASS	Soda Lime Glass, AG Etch	OPERATING TEMPERATURE	-22°F TO +158°F [-30°C TO +70°C]
HOUSING	Plastic - Black	STORAGE TEMPERATURE	-40°F TO +185°F [-40°C TO +85°C]
DISPLAY/HMI		PROTECTION	IP67
SCREEN	3.5-Inch Round, 24-bit color	VIBRATION	Swept Sine (10-2000-10Hz) 10g Peak, 3 Axis Random (10-2000Hz) 8.17g RMS, 3 Axis
RESOLUTION	640 x 516	SHOCK	±50G IN 3 Axis
CONTRAST RATIO / BRIGHTNESS	600:1 1000 cd/m²	EMC/EMI	(2024/30/EU)
TOUCH PANEL	Projected capacitive (PCAP) with glove touch		
SURFACE	Anti-glare finish		
AMBIENT LIGHT SENSOR	Yes		

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

FOR MODEL & PART INFORMATION

FOR MANUAL & SUPPORT DOCUMENTS

FOR SUPPORT & WARRANTY

<https://rajkotmarine.com/enovation.html>

<https://rajkotmarine.com/enovation.html>

<https://rajkotmarine.com/enovation.html>

## SALES CONTACT

### CONTACT

✉ [sales@rajkotmarinelc.ae](mailto:sales@rajkotmarinelc.ae)  
☎ +971 6 7487580  
🌐 [www.rajkotmarine.com](http://www.rajkotmarine.com)

### RAJKOT MARINE LLC

Jerf Industrial Area 1,  
P.O Box 5861  
Ajman, UAE



<https://rajkotmarine.com/enovation.html>